


LED Linear lights

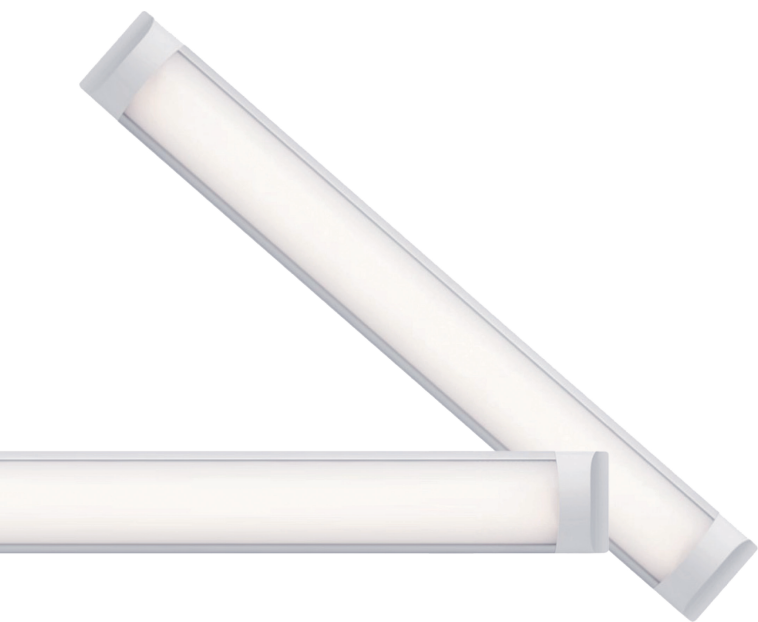

Features




- High lumin, good color rendering
- Exquisite technology, perfect protection
- Innovative design, structure and lighter , Thin and firm and durable
- Clean environmental protection, high efficiency and energy saving

Applications

- Garages Workshops / Basements / Work Areas/ Kitchens / Utility and Recreation Rooms

Technical Specifications

Part No.	Wattage (W)	Beam Angle	Luminous (lm)	Life Span (hrs)	material	Dimensions (mm)	CCT (K)	Working Temperature(°C)
ECOLinear 10W	10	120°	800	20,000	Aluminum&PBT	300*75*23	3000/4200/6500	-20° ~ 40°
ECOLinear 18W	18	120°	1440	20,000	Aluminum&PBT	600*75*23	3000/4200/6500	-20° ~ 40°
ECOLinear 26W	26	120°	2080	20,000	Aluminum&PBT	900*75*23	3000/4200/6500	-20° ~ 40°
ECOLinear 36W	36	120°	2880	20,000	Aluminum&PBT	1200*75*23	3000/4200/6500	-20° ~ 40°
ECOLinear 54W	54	120°	4320	20,000	Aluminum&PBT	1500*75*23	3000/4200/6500	-20° ~ 40°
PRO Linear 26W	26	120°	2160	20,000	Aluminum&PBT	600*75*23	3000/4200/6500	-20° ~ 40°
PRO Linear 36W	36	120°	3240	20,000	Aluminum&PBT	900*75*23	3000/4200/6500	-20° ~ 40°
PRO Linear 54W	54	120°	4860	20,000	Aluminum&PBT	1200*75*23	3000/4200/6500	-20° ~ 40°



✦ It can be available for wide voltage

www.edisunlighting.com

