


LED T5 FIXTURES

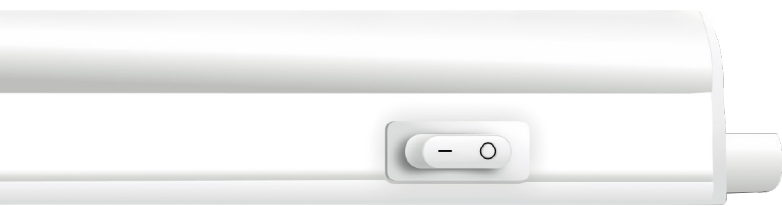

Features



- T5 LED Integrated Single Fixture is extendable with the included series wire terminal, connect the fixtures as desired and experience the freedom of light designing
- Lifetime of more than 25,000+ hours
- Commercial and Industrial Grade
- Rugged steel housing for durability and long life

Applications

- Garages Workshops / Basements / Work Areas/ Kitchens / Utility and Recreation Rooms

Technical Specifications

Part No.	Wattage (W)	Voltage	Luminous (lm)	PF	CRI (Ra)	Dimensions (mm)	CCT (K)	Working Temperature(°C)
STD T5PC30	4	220-240V	380	0.5	80	300*25	3000/4000/6400	-20° ~ 40°
STD T5PC60	8	220-240V	760	0.5	80	600*25	3000/4000/6400	-20° ~ 40°
STD T5PC30	10	220-240V	1045	0.5	80	900*25	3000/4000/6400	-20° ~ 40°
STD T5PC60	14	220-240V	1330	0.5	80	1500*25	3000/4000/6400	-20° ~ 40°



* It can be available for wide voltage

www.edisunlighting.com

