


LED FLAT PANEL

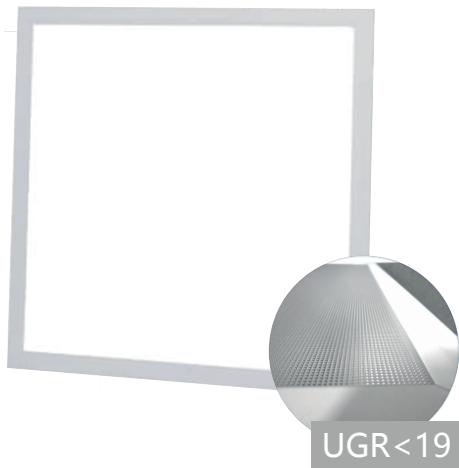

Features




- Ultra Slim Design
- Contemporary & Elegant Design
- Higher Light Transmission Rate
- Exterior shell, cannot easily damaged
- No infrared, does not attract flies
- Easy to install
- No Lead or mercury content hence Environment friendly
- Dimmable options available in selected models

Applications

- Office Lighting (Conference Room, Hospitals, Hotels, Shopping Malls, Showroom and lobby cabin etc.)
- Kitchen and Domestic Lighting

Technical Specifications

Part No.	Wattage (W)	Voltage	Luminous (lm)	PF	CRI (Ra)	Dimension (mm)	CCT (K)	Working Temperature(°C)
STD PL6060 40	40	220-240V	3600	>0.5	>80	595*595*10	3000/4000/6400	-20° ~ 40°
STD PL6060 50	50	220-240V	4500	>0.5	>80	595*595*10	3000/4000/6400	-20° ~ 40°
STD PL6060 60	60	220-240V	5400	>0.5	>80	595*595*10	3000/4000/6400	-20° ~ 40°
STD PL30120 40	40	220-240V	3600	>0.9	>80	295*1195*10	3000/4000/6400	-20° ~ 40°
STD PL30120 50	50	220-240V	4500	>0.9	>80	295*1195*10	3000/4000/6400	-20° ~ 40°
STD PL30120 60	60	220-240V	5400	>0.9	>80	295*1195*10	3000/4000/6400	-20° ~ 40°



✳ It can be available for wide voltage

www.edisunlighting.com

