

LED high bay



Features


- Save over 50% energy.
- Maintenance Free with 50,000 hour lifespan
- High End Aluminum, Scratch and fade resistant, Excellent appearance.
- Anti-glare lens with extreme high transmission.
- IP65 waterproof.

Applications

- Ideal for commercial or industrial lighting warehouse supermarkets furniture store gyms garages general task areas and many other applications

Technical Specifications

Part No.	Wattage (W)	Voltage	Lumen (lm)	PF	CRI	CCT (K)	Beam angle	IP	Working Temperature(℃)
DS-PROHB-100	100	85-265V	12000	0.9	>80	3000K/4000K/6500K	120°	IP20	-25°～45°
DS-PROHB-150	150	85-265V	18000	0.9	>80	3000K/4000K/6500K	120°	IP20	-25°～45°
DS-PROHB-200	200	85-265V	24000	0.9	>80	3000K/4000K/6500K	120°	IP20	-25°～45°

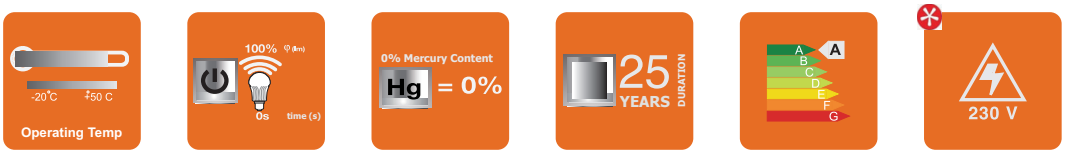

It can be avaliable for wide voltage