



LED PANELS


KEY FEATURES

- Includes Eco-friendly, energy-saving and high luminous efficacy.
- No flickering, no humming.
- Installation way: Recessed, mounted or suspended by fixing bracket on the back.
- Very easy to install. Can be install on wall or any surface places.

LED PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	3200lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED BACKLIT PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>90
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED BACKLIT PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED BACKLIT PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	5400lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED BACKLIT PANEL
40W 120x30cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL German Standard
48W With Driver 62x62cm




Watts	48W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4800lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL
40W 120x30cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL Chile Standard
40W 61x61cm




Watts	40W	Beam Angle	120°
Voltage	AC : 180-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL American Standard
40W 2x2




Watts	40W	Beam Angle	120°
Voltage	AC : 100-277V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED BACKLIT PANEL
60W 120x60cm




Watts	60W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	6000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL American Standard
50W 2x4



Watts	50W	Beam Angle	120°
Voltage	AC : 100-277V	CRI	Ra>80
Flux	5000lm	IP Rating	IP20
PF	0.9	LED Type	SMD

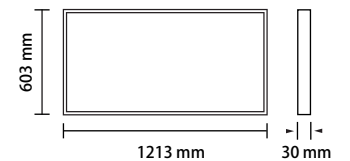




LED PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED PANEL RGBWW
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	IP Rating	IP20
Flux	RGB	LED Type	SMD
PF	0.9		



LED PANEL
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



LED 3D SKY PANEL
40W With Driver 60x60cm






Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
PF	0.9	IP Rating	IP20
		LED Type	SMD



LED PANEL (CCT) Dimmable
40W 60x60cm




Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD

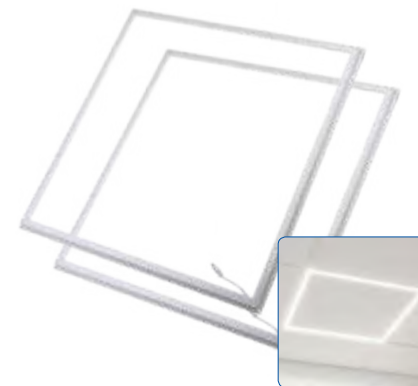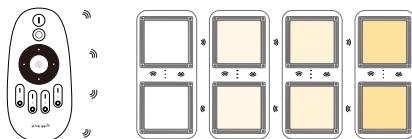

LED FRAME PANEL
40W With Driver 60x60cm



Watts	40W	Beam Angle	120°
Voltage	AC : 185-265V	CRI	Ra>80
Flux	4000lm	IP Rating	IP20
PF	0.9	LED Type	SMD



Accessories for Hanging



Stainless Steel Cable

Clips for LED Panels




FRAMES FOR LED PANELS


Dimension 300x600mm
 Dimension 600x600mm
 Dimension 300x1200mm




SUSPENSION

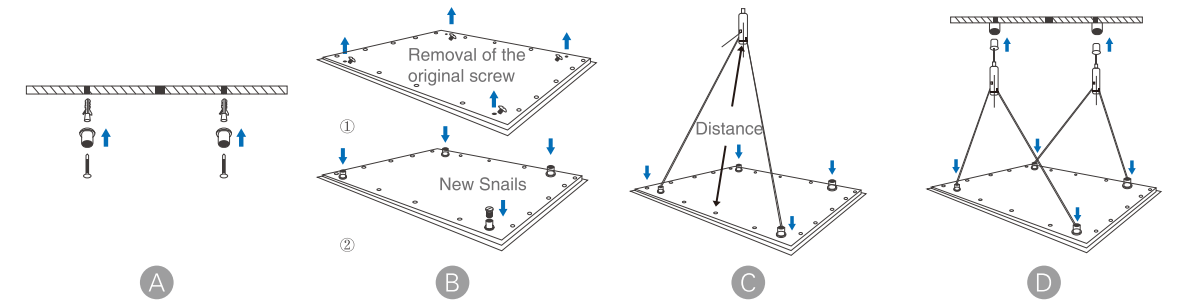


FRAME MOUNTED

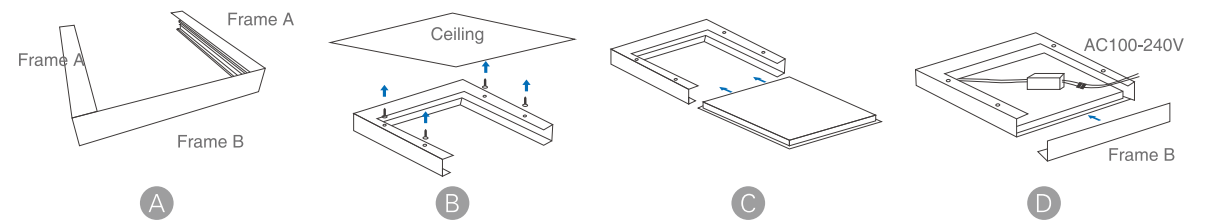

CEILING MOUNTED

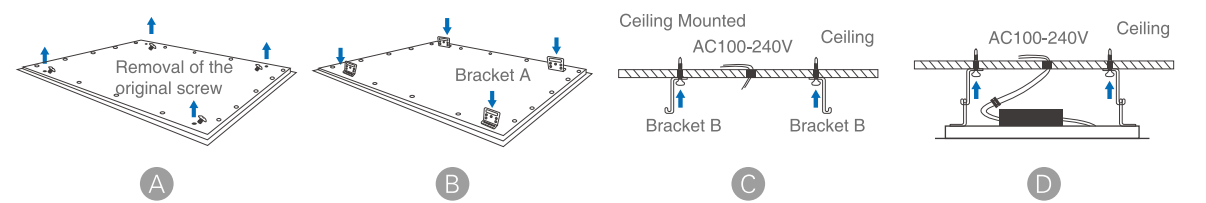


RECESSED IN A CUT-OUT HOLE

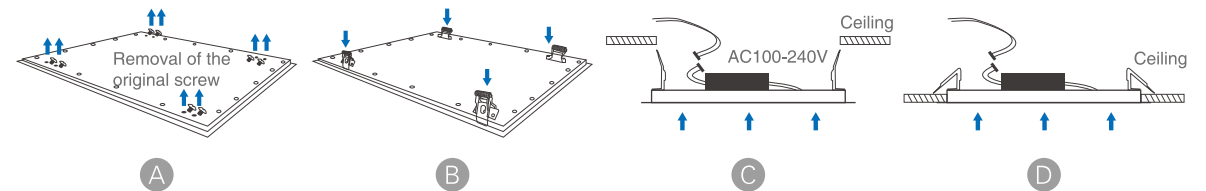




**LED FRAMELESS PANELS
ROUND**

9W Lumens	Watts	9W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	700lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	ø65mm




White Light 6000K
Neutral White 4200K
Warm White 2700K

18W Lumens	Watts	18W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	1400lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	ø100mm




White Light 6000K
Neutral White 4200K
Warm White 2700K

24W Lumens	Watts	24W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	1900lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	ø150mm



White Light 6000K
Neutral White 4200K
Warm White 2700K

36W Lumens	Watts	36W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	2800lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	ø200mm




White Light 6000K
Neutral White 4200K
Warm White 2700K




**LED FRAMELESS PANELS
SQUARE**

9W Lumens	Watts	9W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	700lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	65x65mm




White Light 6000K
Neutral White 4200K
Warm White 2700K

18W Lumens	Watts	18W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	1400lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	100x100mm




White Light 6000K
Neutral White 4200K
Warm White 2700K

24W Lumens	Watts	24W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	1900lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	150x150mm



White Light 6000K
Neutral White 4200K
Warm White 2700K

36W Lumens	Watts	36W	Beam Angle	120°
	Voltage	AC : 85-265V	CRI	Ra>80
	Flux	2800lm	IP Rating	IP20
	LED Type	SMD	Cutting Size	200x200mm



White Light 6000K
Neutral White 4200K
Warm White 2700K



LED MINI PANELS Standard ROUND

<p>3W 150 Lumens</p>	Watts	3W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	150lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	ø68mm		

<p>6W 360 Lumens</p>	Watts	6W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	360lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	ø105mm		

<p>12W 840 Lumens</p>	Watts	12W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	840lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	ø150mm		

<p>18W 1350 Lumens</p>	Watts	18W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1350lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	ø200mm		

<p>24W 1700 Lumens</p>	Watts	24W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1700lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	ø280mm		



LED MINI PANELS Standard SQUARE

<p>3W 150 Lumens</p>	Watts	3W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	150lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	68x68mm		

<p>6W 360 Lumens</p>	Watts	6W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	360lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	105x105mm		

<p>12W 840 Lumens</p>	Watts	12W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	840lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	150x150mm		

<p>18W 1350 Lumens</p>	Watts	18W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1350lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	100x200mm		

<p>24W 1700 Lumens</p>	Watts	24W	Beam Angle	120°		White Light 6000K Neutral White 4200K Warm White 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1700lm	IP Rating	IP20		
	LED Type	SMD	Cutting Size	280x280mm		



ROUND

<p>6W 360 Lumens</p>	Watts	6W	Beam Angle	120°	<p>ø120 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	360lm	IP Rating	IP20		
	LED Type	SMD	Size	ø120mm		

<p>12W 840 Lumens</p>	Watts	12W	Beam Angle	120°	<p>ø170 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	840lm	IP Rating	IP20		
	LED Type	SMD	Size	ø170mm		

<p>18W 1350 Lumens</p>	Watts	18W	Beam Angle	120°	<p>ø223 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1350lm	IP Rating	IP20		
	LED Type	SMD	Size	ø223mm		

<p>24W 1700 Lumens</p>	Watts	24W	Beam Angle	120°	<p>ø300 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1700lm	IP Rating	IP20		
	LED Type	SMD	Size	ø300mm		

<p>30W 2100 Lumens</p>	Watts	30W	Beam Angle	120°	<p>ø300 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	2100lm	IP Rating	IP20		
	LED Type	SMD	Size	ø300mm		



LED MINI PANELS Standard SQUARE

<p>6W 360 Lumens</p>	Watts	6W	Beam Angle	120°	<p>121x121 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	360lm	IP Rating	IP20		
	LED Type	SMD	Size	121x121mm		

<p>12W 840 Lumens</p>	Watts	12W	Beam Angle	120°	<p>172x172 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	840lm	IP Rating	IP20		
	LED Type	SMD	Size	172x172mm		

<p>18W 1350 Lumens</p>	Watts	18W	Beam Angle	120°	<p>224x224 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1350lm	IP Rating	IP20		
	LED Type	SMD	Size	224x224mm		

<p>24W 1700 Lumens</p>	Watts	24W	Beam Angle	120°	<p>300x300mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	1700lm	IP Rating	IP20		
	LED Type	SMD	Size	300x300mm		


<p>30W 2100 Lumens</p>	Watts	30W	Beam Angle	120°	<p>300x300 mm</p>	White Light ■ 6000K Neutral White ■ 4200K Warm White ■ 2700K
	Voltage	AC : 85-260V	CRI	Ra>80		
	Flux	2100lm	IP Rating	IP20		
	LED Type	SMD	Size	300x300mm		



LED PANELS
ROUND Build-in Driver



Watts	8W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	480lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø70-90mm




White Light 6000K
Neutral White 4200K
Warm White 2700K



LED PANELS
SQUARE Build-in Driver




Watts	8W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	480lm	IP Rating	IP20
LED Type	SMD	Cutting Size	70-90mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	12W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1080lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø100-120mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	12W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1080lm	IP Rating	IP20
LED Type	SMD	Cutting Size	100-120mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	18W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1620lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø160-170mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	18W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1620lm	IP Rating	IP20
LED Type	SMD	Cutting Size	160-170mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	22W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1980lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø200-210mm



White Light 6000K
Neutral White 4200K
Warm White 2700K



Watts	22W	Beam Angle	120°
Voltage	AC : 85-300V	CRI	Ra>80
Flux	1980lm	IP Rating	IP20
LED Type	SMD	Cutting Size	200-210mm




White Light 6000K
Neutral White 4200K
Warm White 2700K



LED PANELS SURFACE
ROUND Build-in Driver


 <p>1080 Lumens</p>	Watts	12W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1080lm	IP Rating	IP20
	LED Type	SMD	Size	ø130x30mm




- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K





LED PANELS SURFACE
SQUARE Build-in Driver

 <p>1080 Lumens</p>	Watts	12W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1080lm	IP Rating	IP20
	LED Type	SMD	Size	130x130x30mm





- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K

 <p>1620 Lumens</p>	Watts	18W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1620lm	IP Rating	IP20
	LED Type	SMD	Size	ø180x30mm




- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K

 <p>1620 Lumens</p>	Watts	18W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1620lm	IP Rating	IP20
	LED Type	SMD	Size	180x180x30mm





- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K

 <p>1980 Lumens</p>	Watts	22W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1980lm	IP Rating	IP20
	LED Type	SMD	Size	ø220x30mm



- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K

 <p>1980 Lumens</p>	Watts	22W	Beam Angle	120°
	Voltage	AC : 85-300V	CRI	Ra>80
	Flux	1980lm	IP Rating	IP20
	LED Type	SMD	Size	220x220x30mm




- White Light ■ 6000K
- Neutral White ■ 4200K
- Warm White ■ 2700K




LED PANELS Project
ROUND



Watts	8W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	800lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø75mm




White Light 6000K
Neutral White 4200K
Warm White 2700K



LED PANELS Project
SQUARE




Watts	8W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	800lm	IP Rating	IP20
LED Type	SMD	Cutting Size	75x75mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	15W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	1500lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø120mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	15W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	1500lm	IP Rating	IP20
LED Type	SMD	Cutting Size	120x120mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	20W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	2000lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø150mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	20W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	2000lm	IP Rating	IP20
LED Type	SMD	Cutting Size	150x150mm



White Light 6000K
Neutral White 4200K
Warm White 2700K




Watts	30W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	3000lm	IP Rating	IP20
LED Type	SMD	Cutting Size	ø200mm




White Light 6000K
Neutral White 4200K
Warm White 2700K



Watts	30W	Beam Angle	120°
Voltage	AC : 85-380V	CRI	Ra>80
Flux	3000lm	IP Rating	IP20
LED Type	SMD	Cutting Size	200x200mm



White Light 6000K
Neutral White 4200K
Warm White 2700K



Easy To Installation :
 ■ Put the Wire Inside of The Wire Connector Directly



**LED PANELS
 CCT CHANGING**



Watts 4W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 70 mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



Watts 8W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 105 mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



Watts 12W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 155mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



Watts 15W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 210mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



Watts 22W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 285mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



Watts 30W
Input Voltage AC : 85-300V
Flux 85-100lm/W
LED Type SMD

Beam Angle 120°
CRI Ra>80
IP Rating IP20
Cutting Size 285mm

White Light 6000K
 Neutral White 4200K
 Warm White 2700K



CCT Application:
 ■ Before Installation The Product,
 Need Choose The Color Temperature,
 So Don't Need Make The Stock For All
 The Color Temperature



02
 ADC12 Aluminum For The Housing

03
 Strong Power Spring



05
 Iron Backplane of The Housing

04
 3MM Screw