

LED INDUSTRIAL LIGHT

PRODUCT FEATURES


- Ideal for commercial or industrial lighting, warehouse, supermarkets, furniture store, gyms, garages, general task areas, and many other applications
- Excellent lens design, tempered glass, extreme high transmission
- Eco-Friendly. No lead or mercury. No Hazardous Emissions. No UV or IR Radiation.



LED SOLAR STREET LIGHT 20/40/60W

Product code DSSORSTECO CRI Ra>70
 Watts 20/40/60W IP Rating IP65
 Charging Time 4-6h Dimension 465x185x55 mm
 Beam Angle 140° Body Color Black/Grey


White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED SOLAR STREET LIGHT With Light and Remote Control

Product code DSSORSTECO CRI Ra>70
 Watts 30/60/120W IP Rating IP65
 Material Die-cast Aluminum Dimension 350x150x55 mm
 Beam Angle 140° Body Color Silvery

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED SOLAR STREET LIGHT 60W

Product code SLTYNLD196
 Watts 60W CRI Ra>70
 Battery 3.2V / 10Ah IP Rating IP65
 Flux 120lm/W Dimension 410x200x70mm
 Beam Angle 120° Body Color Black

* Light Control
 * Remote Control
 White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED SOLAR STREET LIGHT 120W

Product code SLTYNLD196
 Watts 120W CRI Ra>70
 Battery 3.2V / 10Ah IP Rating IP65
 Flux 120lm/W Dimension 560x265x70mm
 Beam Angle 120° Body Color Black

* Light Control
 * Remote Control
 White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED SOLAR STREET LIGHT 180W

Product code SLTYNLD196
 Watts 180W CRI Ra>70
 Battery 3.2V / 10Ah IP Rating IP65
 Flux 120lm/W Dimension 690x290x70mm
 Beam Angle 120° Body Color Black

* Light Control
 * Remote Control
 White Light 6500K
 Neutral White 4200K
 Warm White 2700K





LED STREET LIGHT With Solar Panels and Remote Control



	Product code JKC-40	Flux 170lm/W	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 40W Charging Time 6h Beam Angle 140°	IP Rating IP65 Dimension 598x230x261 mm Body Color Silvery	
	Product code JKC-60	Flux 170lm/W	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 60W Charging Time 6h Beam Angle 140°	IP Rating IP65 Dimension 598x230x261 mm Body Color Silvery	
	Product code JKC-80	Flux 170lm/W	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 80W Charging Time 6h Beam Angle 140°	IP Rating IP65 Dimension 598x230x261 mm Body Color Silvery	
	Product code JKC-100	Flux 170lm/W	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 100W Charging Time 6h Beam Angle 140°	IP Rating IP65 Dimension 598x230x261 mm Body Color Silvery	
	Product code JKC-120	Flux 170lm/W	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 120W Charging Time 6h Beam Angle 140°	IP Rating IP65 Dimension 598x230x261 mm Body Color Silvery	

LED STREET LIGHT With Solar Panels and Remote Control




	Product code DSZC30	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 30W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 575x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC40	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 40W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 665x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC50	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 50W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 665x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC60	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 60W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 665x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC80	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 80W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 755x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC100	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 100W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 845x280x100 mm Body Color Black/Green/Customizable	
	Product code DSZC120	IP Rating IP65	White Light 6500K Neutral White 4200K Warm White 2700K
	Watts 120W Charging Time 5-6h Beam Angle 140°	Remote Control Yes Dimension 845x280x100 mm Body Color Black/Green/Customizable	

LED SOLAR STREET LIGHT 20W



Product code	G20	Flux	2000lm
Watts	20W	IP Rating	IP65
Charging Time	6-10h	Dimension	840x235x150 mm
Beam Angle	120°	Body Color	Silvery

White Light ■ 6500K
 Neutral White ■ 4200K
 Warm White ■ 2700K




LED SOLAR STREET LIGHT 50W



Product code	G50	Flux	5000lm
Watts	50W	IP Rating	IP65
Charging Time	6-10h	Dimension	1630x435x234 mm
Beam Angle	120°	Body Color	Silvery

White Light ■ 6500K
 Neutral White ■ 4200K
 Warm White ■ 2700K




LED SOLAR STREET LIGHT 30W



Product code	G30	Flux	3000lm
Watts	30W	IP Rating	IP65
Charging Time	6-10h	Dimension	1100x235x150 mm
Beam Angle	120°	Body Color	Silvery

White Light ■ 6500K
 Neutral White ■ 4200K
 Warm White ■ 2700K





LED SOLAR STREET LIGHT 100W



Product code	G100	Flux	10000lm
Watts	100W	IP Rating	IP65
Charging Time	6-10h	Dimension	2000x435x234 mm
Beam Angle	120°	Body Color	Silvery


White Light ■ 6500K
 Neutral White ■ 4200K
 Warm White ■ 2700K



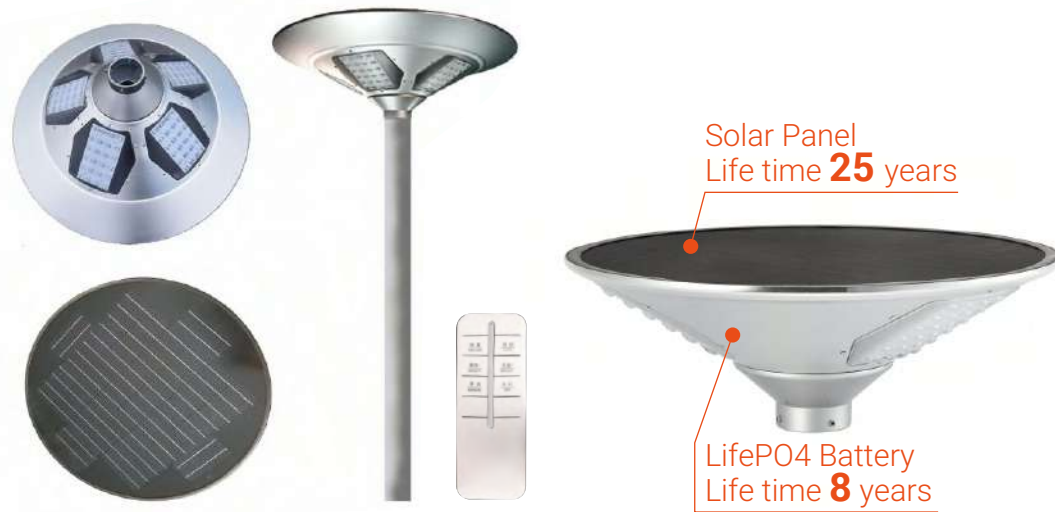

LED STREET LIGHT

With Solar Panels and Remote Control
Bridgelux brightness LED



	Product code	JKC-J20	View Angle	360°	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	20W	Dimension	Φ570x230 mm	
	Battery	144WH/12V	IP Rating	IP65	
	Flux	2000lm	Body Color	Silvery	

	Product code	JKC-J30	View Angle	360°	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	30W	Dimension	Φ660x240 mm	
	Battery	320WH/12V	IP Rating	IP65	
	Flux	3000lm	Body Color	Silvery	

	Product code	JKC-J50	View Angle	360°	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	50W	Dimension	Φ760x250 mm	
	Battery	420WH/12V	IP Rating	IP65	
	Flux	5000lm	Body Color	Silvery	



LED STREET LIGHT

	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	30W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	278x130x63 mm	
	Beam Angle	70x140°	Body Color	Black	
	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	50W/60W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	425x173x75 mm	
	Beam Angle	70x140°	Body Color	Black	
	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	100W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	506x212x75 mm	
	Beam Angle	70x140°	Body Color	Black	
	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	150W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	602x227x77.5 mm	
	Beam Angle	70x140°	Body Color	Black	
	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	200W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	656x242x72 mm	
	Beam Angle	70x140°	Body Color	Black	
	Product code	DS-ST-LX	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	250W	IP Rating	IP65	
	Voltage	AC100-265V	Dimension	816x301x81.5 mm	
	Beam Angle	70x140°	Body Color	Black	



LED STREET LIGHT



Product code CET-126
 Watts 20W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 315x128x52 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code CET-126
 Watts 30W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 350x142x52 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code CET-126
 Watts 50W/60W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 405x166x72 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code CET-126
 Watts 100W/120W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 484x211x77 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code CET-126
 Watts 150W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 580x242x77 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code CET-126
 Watts 200W/250W
 Voltage AC85-305V
 Beam Angle 70x140°

CRI Ra>70
 IP Rating IP65
 Dimension 685x300x106 mm
 Body Color Black/Grey

White Light 6500K
 Neutral White 4200K
 Warm White 2700K

LED STREET LIGHT



Product code LD17-30
 Watts 30W
 Voltage AC100-265V
 Beam Angle 85x140°

CRI Ra>70
 IP Rating IP66
 Dimension 130x53x340 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code LD17-50
 Watts 50W
 Voltage AC100-265V
 Beam Angle 85x140°

CRI Ra>70
 IP Rating IP66
 Dimension 155x55x390 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code LD17-100
 Watts 100W
 Voltage AC100-265V
 Beam Angle 85x140°

CRI Ra>70
 IP Rating IP66
 Dimension 160x65x450 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code LD17-150
 Watts 150W
 Voltage AC100-265V
 Beam Angle 85x140°

CRI Ra>70
 IP Rating IP66
 Dimension 170x65x570 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED STREET LIGHT



Product code ECOST30
Watts 30W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 350x150x60 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



Product code ECOST50
Watts 50W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 500x230x80 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



Product code ECOST100
Watts 100W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 720x280x30 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



Product code ECOST150
Watts 150W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 860x330x80 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



Product code ECOST200
Watts 200W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 950x350x80 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



Product code ECOST250
Watts 250W
Voltage AC85-265V
Beam Angle 70x140°

CRI Ra>80
IP Rating IP65
Dimension 1100x340x90 mm
Body Color Black/Grey

White Light 6500K
Neutral White 4200K
Warm White 2700K



LED STREET LIGHT
50/100/150W

Product code DS-ST-FH
Watts 50/100/150W
Voltage AC180-265V
Beam Angle 70x140°

CRI Ra>70
IP Rating IP65
Body Color Silvery
Dimension 380x160x70 mm
505x205x83 mm
600x260x83 mm

White Light 6500K
Neutral White 4200K
Warm White 2700K




LED STREET LIGHT
50/100/150W

Product code DS-ST-SX
Watts 50/100/150W
Voltage AC100-265V
Beam Angle 70x140°

CRI Ra>70
IP Rating IP65
Body Color Black/Grey
Dimension 560x203x45 mm
670x215x80 mm
725x240x75 mm

White Light 6500K
Neutral White 4200K
Warm White 2700K





LED LINEAR HIGHBAY LIGHT



Product code DS-LINEAR-HIGHBAY
 Watts 70W
 Voltage AC220-240V
 Beam Angle 110°

CRI Ra>70
 IP Rating IP65
 Dimension 476x131x153.4 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-LINEAR-HIGHBAY
 Watts 100W
 Voltage AC220-240V
 Beam Angle 110°

CRI Ra>70
 IP Rating IP65
 Dimension 476x131x153.4 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-LINEAR-HIGHBAY
 Watts 150W
 Voltage AC220-240V
 Beam Angle 110°

CRI Ra>70
 IP Rating IP65
 Dimension 924x131x157.4 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K




Product code DS-LINEAR-HIGHBAY
 Watts 200W
 Voltage AC220-240V
 Beam Angle 110°

CRI Ra>70
 IP Rating IP65
 Dimension 924x131x157.4 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K


LED Linear highbay light with sensor

- Sensor/constant light switch easily
- Maximum sensor distance is 15m
- Customized modes; IP65 waterproof rating
- Microwave sensor, stable function in different environment & temperature

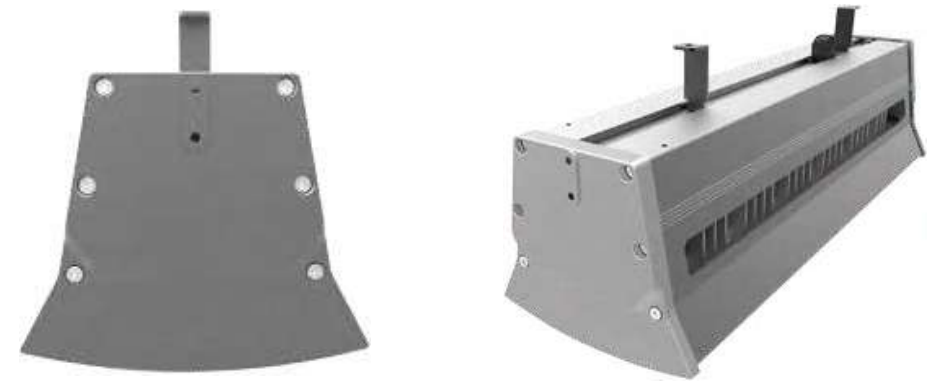


Technical parameters


DS-LINEAR-HIGHBAY 70W

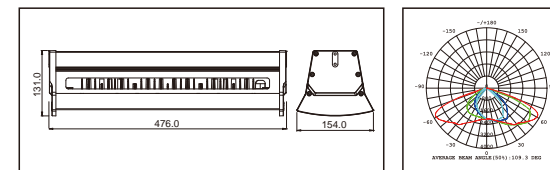

DS-LINEAR-HIGHBAY 100W

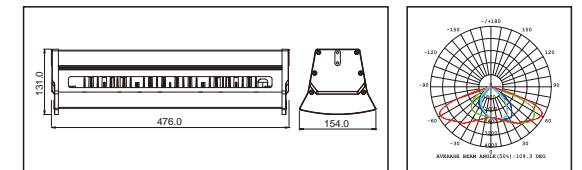


DS-LINEAR-HIGHBAY 150W 200W

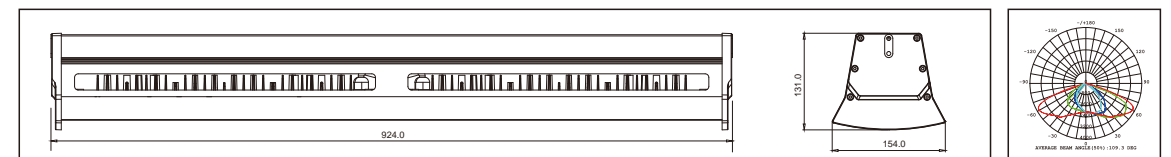


Stadium Pro



LED GALAXY FLOODLIGHT Galaxy Series



	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	300W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	496x352x112 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	
	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	400W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	496x447x112 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	
	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	500W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	496x542x112 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	
	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	600W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	496x638x112 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	
	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	800W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	1029x659x122 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	
	Product code	DS-GALAXY	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	1000W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	1029x754x122 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	30°/60°/90°/45x80°	Body Color	Black	

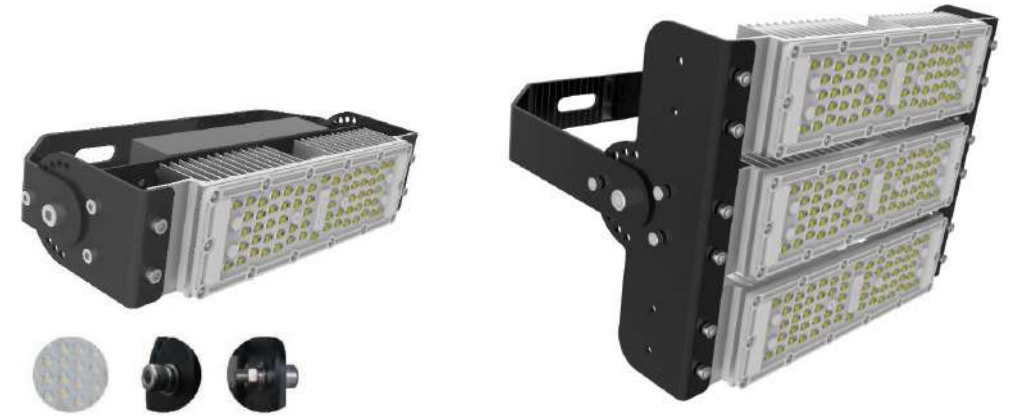

LED TUNNEL FLOODLIGHT Tunnel Series



	Product code	DS-TUNNEL-LIGHT	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	50W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	330x115x115 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	90°/90x120°	Body Color	Black	
	Product code	DS-TUNNEL-LIGHT	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	100W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	330x205x115 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	90°/90x120°	Body Color	Black	
	Product code	DS-TUNNEL-LIGHT	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	150W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	330x205x115 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	90°/90x120°	Body Color	Black	
	Product code	DS-TUNNEL-LIGHT	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	180W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	645x205x115 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	90°/90x120°	Body Color	Black	
	Product code	DS-TUNNEL-LIGHT	CRI	Ra>70	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Watts	200W	IP Rating	IP65	
	Voltage	AC100-240V	Dimension	645x205x115 mm	White Light ■ 6500K Neutral White ■ 4200K Warm White ■ 2700K
	Beam Angle	90°/90x120°	Body Color	Black	



LED UFO HIGHBAY



Product code DS-UFO-FG-N
 Watts 100W
 Voltage AC100-265V
 Beam Angle 90°

CRI Ra>70
 IP Rating IP65
 Dimension ϕ 222x85 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED UFO HIGHBAY



Product code DS-GK12
 Watts 100W
 Voltage AC85-265V/220-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension ϕ 270x55 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-FG-N
 Watts 150W
 Voltage AC100-265V
 Beam Angle 90°

CRI Ra>70
 IP Rating IP65
 Dimension ϕ 264x93 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-GK12
 Watts 150W
 Voltage AC85-265V/220-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension ϕ 305x55 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-FG-N
 Watts 200W
 Voltage AC100-265V
 Beam Angle 90°

CRI Ra>70
 IP Rating IP65
 Dimension ϕ 302x93 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-GK12
 Watts 200W
 Voltage AC85-265V/220-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension ϕ 370x55 mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



LED UFO HIGHBAY



Product code DS-UFO-MOON
 Watts 100W
 Voltage AC100-240V
 Beam Angle 60°/90°/120°

CRI Ra>80
 IP Rating IP65
 Dimension $\phi 205.8 \times 125.7$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-MOON
 Watts 150W
 Voltage AC100-240V
 Beam Angle 60°/90°/120°

CRI Ra>80
 IP Rating IP65
 Dimension $\phi 250 \times 131.6$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-MOON
 Watts 200W
 Voltage AC100-240V
 Beam Angle 60°/90°/120°

CRI Ra>80
 IP Rating IP65
 Dimension $\phi 294 \times 143$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K

C93 Optional

Moon series exceptionally reaches a high CRI to restore the real color

IK10

Main material is die-casting aluminum and PC lens. The whole fixture is IK10

Anti-Corrosion Surface

The heatsink and other accessories are power-coated which result of increasing adhesion and resisting corrosion for severe environment in industrial applications.

277-480V AC High Voltage Optional

Voltage: 100-277Vac 277-480Vac

IEC62471 Risk Zero

Both traditional HID while working, which will decolor the object after a longtime lighting up. These goes against for good retail stocking. Fortunately, to provide a healthy and safety environment, our Moon Series never generates UV.

Optional Lampshade



Aluminum cover



PC cover

Configuration Scheme



Round driver



Linear driver



Vertical bracket



Microwave Sensor

Various Installation Methods



Pipe mounting



Pole mounting



Loop hanging



Hook



Ceiling installation



LED SENSOR UFO HIGHBAY



Product code DS-UFO-DIY-S
 Watts 100W
 Voltage AC100-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension $\Phi 310 \times 176$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-DIY-S
 Watts 150W
 Voltage AC100-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension $\Phi 310 \times 176$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-DIY-S
 Watts 200W
 Voltage AC100-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension $\Phi 360 \times 248$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K



Product code DS-UFO-DIY-S
 Watts 240W
 Voltage AC100-240V
 Beam Angle 90°

CRI Ra>80
 IP Rating IP65
 Dimension $\Phi 360 \times 248$ mm
 Body Color Black

White Light 6500K
 Neutral White 4200K
 Warm White 2700K

DIY UFO High Bay Light with Detachable Microwave Sensor

- Dimmable
- Smart
- Microwave Sensor

- When the microwave sensor senses walking, the lamp will 100% brightness.
- If there is no walking, the lamp will be 50% brightness after 10 seconds.
- 20 Seconds later, there will be no brightness if there is no walking.



Using CREE/Lumileds/Osram SMD LED Chips, Making Luminous Efficacy more than 170lm/W.

More Beam Angles for Option: 60°, 90°, 120°

