




EDISON

2021

LED LINEAR LIGHT

LED Linear Light Leto Type

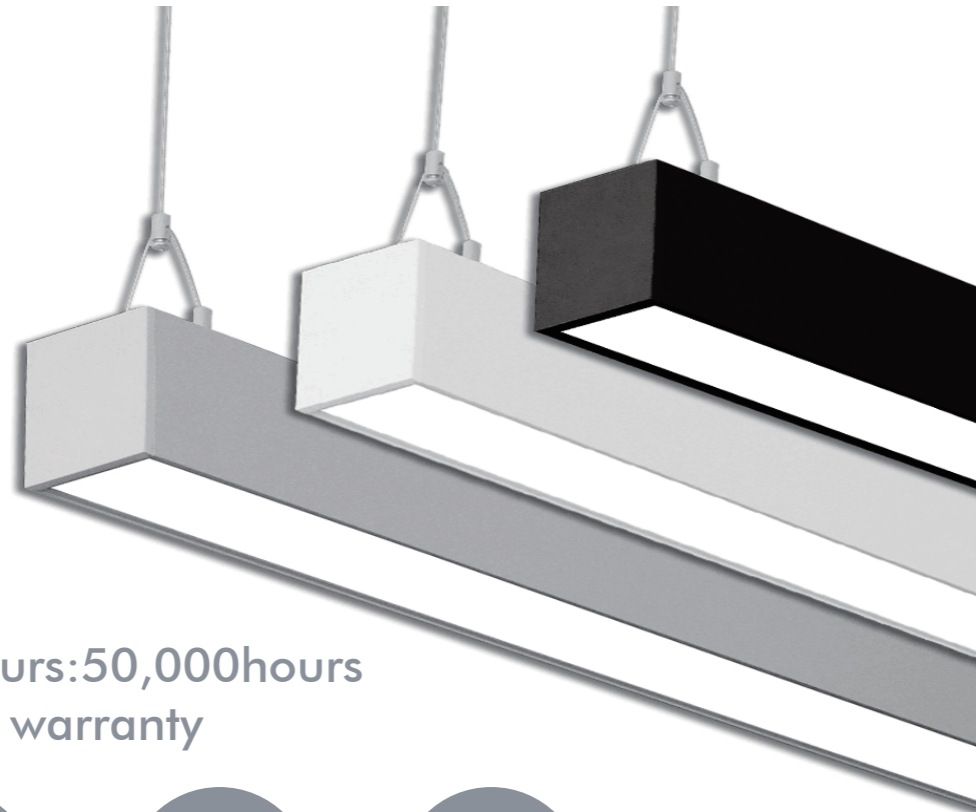

Life hours:50,000hours
5years warranty

130
LM/W

Linkable

Microprism
diffuser
optional

LED Linear Light Leto Type

- 1.Simple LED linear lamp, using high-quality aluminum alloy profile lamp body, screwless aluminum end cap
- 2.Light line tough and beautiful, has scientific appearance and size ratio, reasonable structure, convenient and flexible installation and maintenance.
- 3.The luminaire combines the innovative direct lighting + indirect lighting lighting , using anti-glare PC cover to control light, anti-glare effect is good, flame-retardant PC grille, the light is uniform and no shadow, the light cover and the lamp body are perfectly combined to make the whole light is more beautiful.
- 4.Cover options: Flame-retardant PC grille / flame-retardant PC lens / flame-retardant PC anti-glare cover.
- 5.Designed to meet recommended luminance and illuminance requirements for low bay and task level applications in office, education, health, retail and exhibition.

Application



Office buildings, schools, hospitals, high-end supermarkets, shopping malls, hotels and other public buildings

Power	Lumen/W	DF	Beam Angle	UGR	Housing Color	Size (MM)	Certification No.	Reference Item
24W	100/120/130	>0.9	80°/100°	<19/22	Silver/White/Black	50×70×600	LED Linear 24w	ES-5070-24W-60-Leto
30W	100/120/130	>0.9	80°/100°	<19/22	Silver/White/Black	50×70×1200	LED Linear 30w	ES-5070-30W-120-Leto
40W	100/120/130	>0.9	80°/100°	<19/22	Silver/White/Black	50×70×1500	LED Linear 40w	ES-5070-40W-150-Leto
80W	100/120/130	>0.9	80°/100°	<19/22	Silver/White/Black	50×70×3000	LED Linear 80w	ES-5070-80W-300-Leto

WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K

IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input Voltage: 100-240V AC,CRI>80/>90

LED Linear Light Donar



DALI/1-10W
Dimmable

Seamless
Linkable


CCT
Changing

Life hours:50,000hours
5years warranty

LED Linear Light Donar

- 1.LED linear light series are high-end flexible decorative lamps, characterized by low power consumption, long life, high brightness, easy installation and none maintenance consumption, long life, high brightness, easy installation and none maintenance
- 2.Especially it is suitable for indoor building structure decorationand billboard production.
- 3.This series have different length and different power to satisfy different demands according to customer demand, we can also customize the linear light of different specifications.
- 4.Up and Down deisgn is optional which can make room more translucent

Application

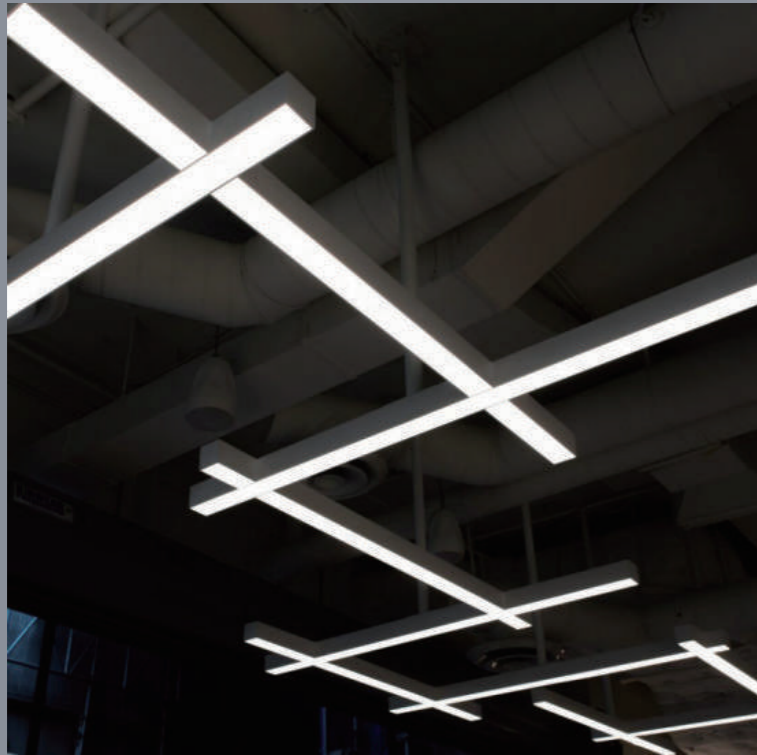


Bed rooms/Offices/Meeting rooms/ Shopping markets/
School/ Restaurants/ Airport

Power	Lumen/W	DF	Beam angle	Beam Angle Micropris	Housing Color	Size(MM)	Certification No.	Reference Item
30W	100/120/130	>0.9	100°	70°	White/Black/Silver	600x636x784	LED linear 30W-B	ESD-6378-60-30W-Donar
30W	100/120/130	>0.9	100°	70°	White/Black/Silver	1200x636x784	LED linear 30W-D	ESD-6378-120-30W-Donar
36W	100/120/130	>0.9	100°	70°	White/Black/Silver	1200x636x784	LED linear 36W-D	ESD-6378-120-36W-Donar
50W	100/120/130	>0.9	100°	70°	White/Black/Silver	1500x636x784	LED linear 50W-E	ESD-6378-150-50W-Donar
60W	100/120/130	>0.9	100°	70°	White/Black/Silver	2400x636x784	LED linear 60W-F	ESD-6378-240-60W-Donar

WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K

IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input Voltage: 100-240V AC,CRI>80/>90

Product Information



Louver




Micro-Prism





Opal

Luminous Intensity Distribution Curve(cd/klm)

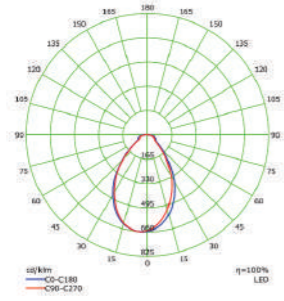

Luminous Intensity Distribution Curve(cd/klm)

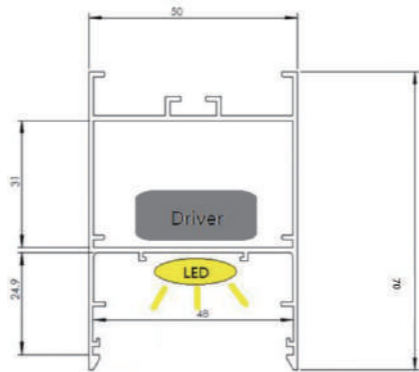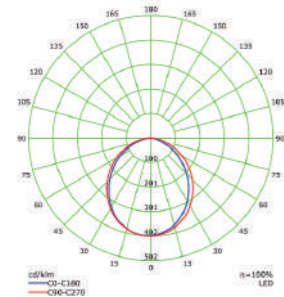

Installation

Normal Suspending

STEP 1 STEP 2 STEP 3 STEP 4 STEP 5 STEP 6


suspending Mountings Standing Finish Complete Hoisting Incandescent Fixture

Surface mounted


STEP 1 STEP 2 STEP 3 STEP 4

Standing Finish Rotating Parts Rotating Parts Completing Installation


Linkable details

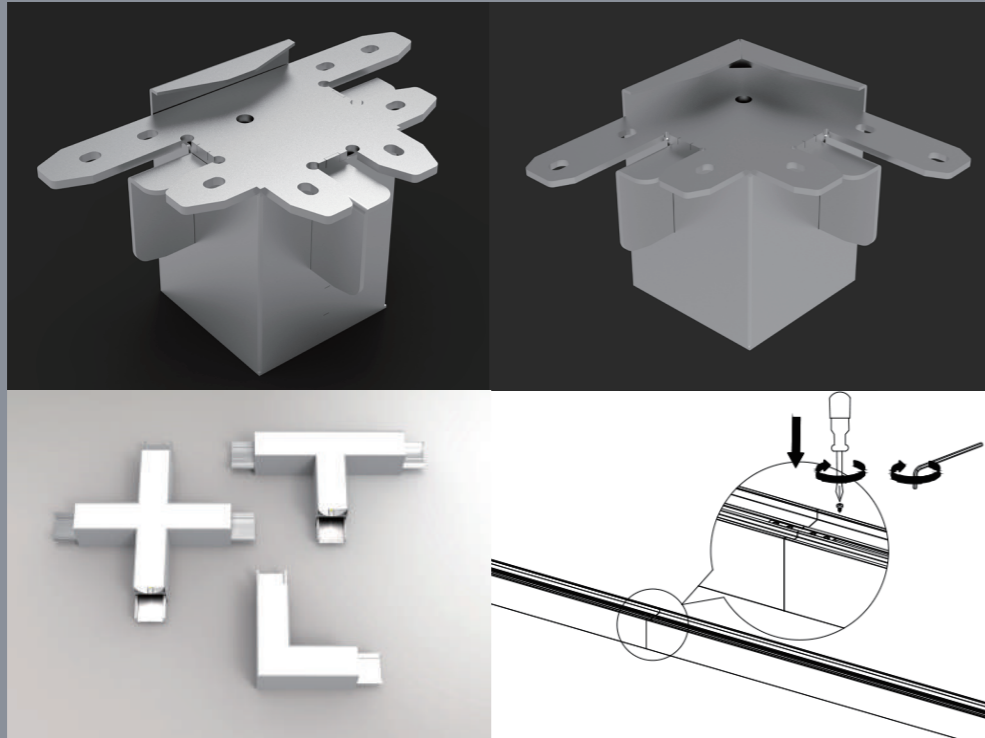

DS 5070 Series linear light, offer different linkable shape, "T" ,"X" and "L", with LED light/without LED light. Modern splicing, make the multi shapes

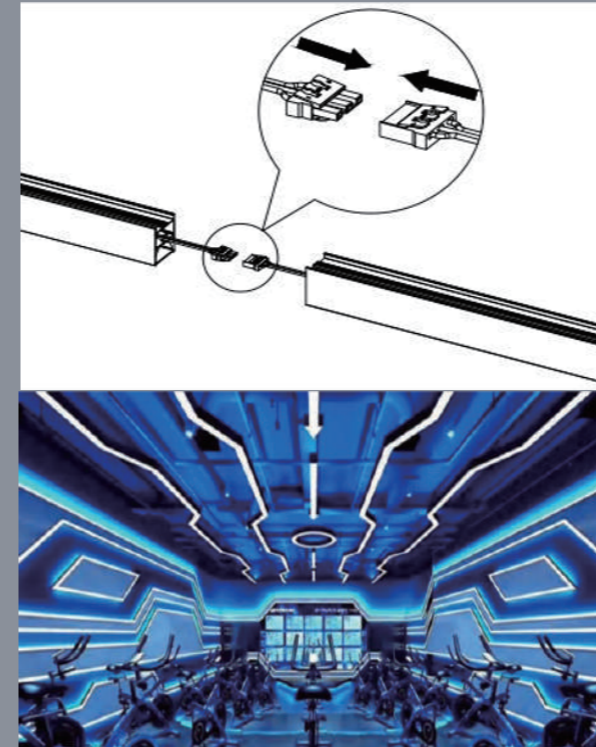


INNER LINKAGE

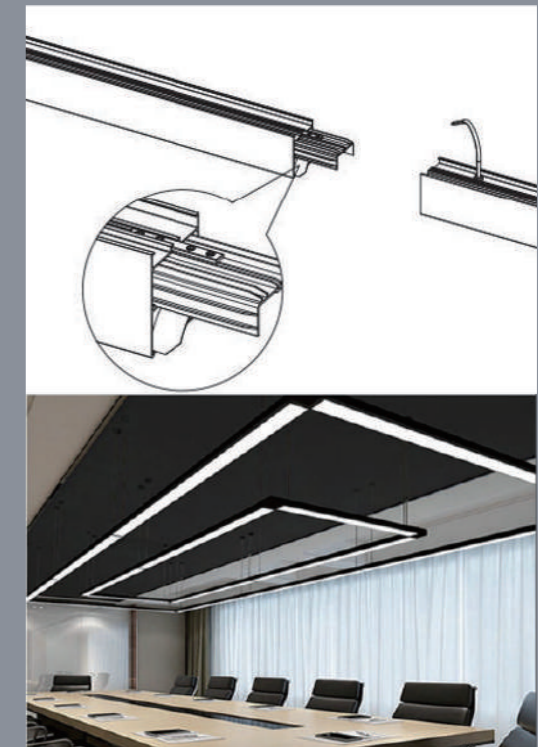

OUTER LINKAGE

LED Linear Light Hera Type

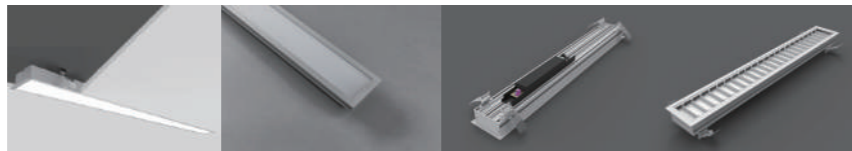

Life hours:50,000hours
5years warranty

LED Linear Light Hera Type

- 1.Aluminum led PCB will be fixed on the aluminum profile by slot ,good heat dissipation.
- 2.Light soure chip: Sanan/ Osram/Sumsung.
- 3.Energy saving, light soft, anti-glare, no flicker.
- 4.Easy installation and maintenance, all of installation components, without requiring the user to purchase separately.

Application



Commercial lighting/Office lighting/Hall/Meeting room/Gym/Recreation center/Restaurant/supermarket/airport Station/basement/museum/library

Power	Lumen/W	CRI	UGR	DF	Beam Angle	Housing Color	Size (MM)	Certification NO.	Reference Item
24W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	600*60*35 600*75*35	LED linear 24W	ESH-3560-60-24W ESH-3575-60-24W
40W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	1200*60*35 1200*75*35	LED linear 40W	ESH-3560-120-24W ESH-3575-120-40W
50W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	1500*60*35 1500*75*35	LED linear 50W	ESH-3560-150-24W ESH-3575-150-50W
80W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	3000*60*35 3000*75*35	LED linear 80W	ESH-3560-150-24W ESH-3575-150-80W
WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K									
IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input voltage:100-240V AC,CRI>80/>90									

LED Linear Light Iris Type



3000-6000K



Life hours:50,000hours
5years warranty

LED Linear Light Iris Type

- 1.Iris LED linear with CCT changing function options
One is through dip switch to choose different color temperature,it can help customer reduce stock pressure.
- 2.Another one is through 2.4G remote controller dimmable and adjust different color temperature,product use high quality aluminum material,no screws deisgn,meet customer modem and fashion home decoration.



Application



Bed rooms/Office/Meeting rooms/Shopping markets /School/Restaurants/Airport

Power	Lumen/W	DF	Beam angle	Beam Angle Microprism	Housing Color	Size (MM)	Certification NO.	Reference Item
12W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:600*W:64*H:78 L:600*W:50*H:70	LED linear 12W	ESI-6378-60-12W ESI-5070-60-12W
30W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:1200*W:64*H:78 L:1200*W:50*H:70	LED linear 30W	ESI-6378-120-30W ESI-5070-120-30W
40W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:1200*W:64*H:78 L:1200*W:50*H:70	LED linear 40W	ESI-6378-120-40W ESI-5070-120-40W
50W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:1500*W:64*H:78 L:1500*W:50*H:70	LED linear 50W	ESI-6378-150-50W ESI-5070-150-50W
60W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:2400*W:64*H:78 L:2400*W:50*H:70	LED linear 60W	ESI-6378-240-60W ESI-5070-240-60W
80W	100/120/130	>0.9	100°	70°	White/Black/Silver	L:3000*W:64*H:78 L:3000*W:50*H:70	LED linear 80W	ESI-6378-300-80W ESI-5070-300-80W
WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K								
IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input voltage:100-240V AC,CRI>80/>90								

LED Linear Light Zeus Type

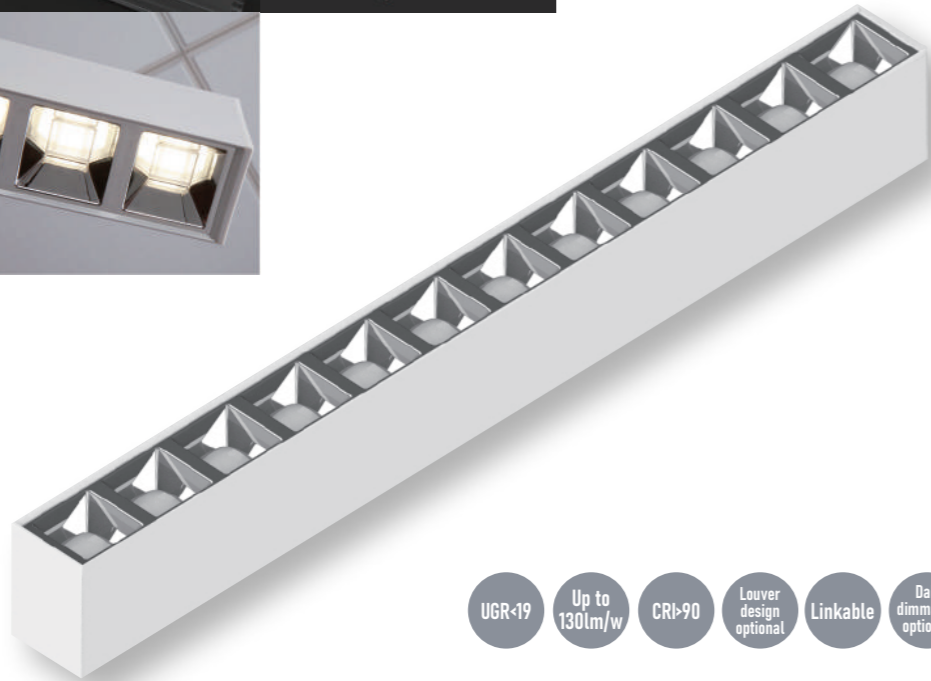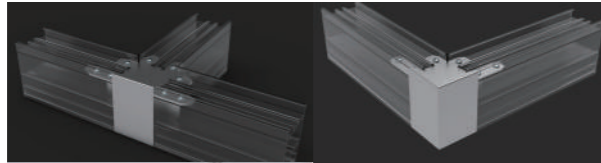

Life hours:50,000hours
5years warranty

LED Linear Light Zeus Type

1. Meet the needs of various engineering size and shape designs
2. Zeus pendant luminaires with common linear light distribution produce superb uniformity when arranged centrally above the table
3. Zeus offers nice glare-control, protects people's eye perfectly;
- 4..According to customer needs, customization is optional:reflector module,grille,milky diffuser


Application



Meeting room/Bar counter/Dining room/Drawing room/Corridor

Power	Lumen/W	CRI	UGR	DF	Beam Angle	Housing Color	Size (MM)	Certification NO.	Reference Item
24W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	600*60*35 600*75*35	LED linear 24W	ESH-3560-60-24W ESH-3575-60-24W
40W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	1200*60*35 1200*75*35	LED linear 40W	ESH-3560-120-24W ESH-3575-120-40W
50W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	1500*60*35 1500*75*35	LED linear 50W	ESH-3560-150-24W ESH-3575-150-50W
80W	100/120/130/140	80°/90°	<22/<19	>0.9	70°/100°	White/Black/Silver	3000*60*35 3000*75*35	LED linear 80W	ESH-3560-150-24W ESH-3575-150-80W
WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K									
IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input voltage:100-240V AC,CRI>80/>90									

LED Linear Light Honeybee Type

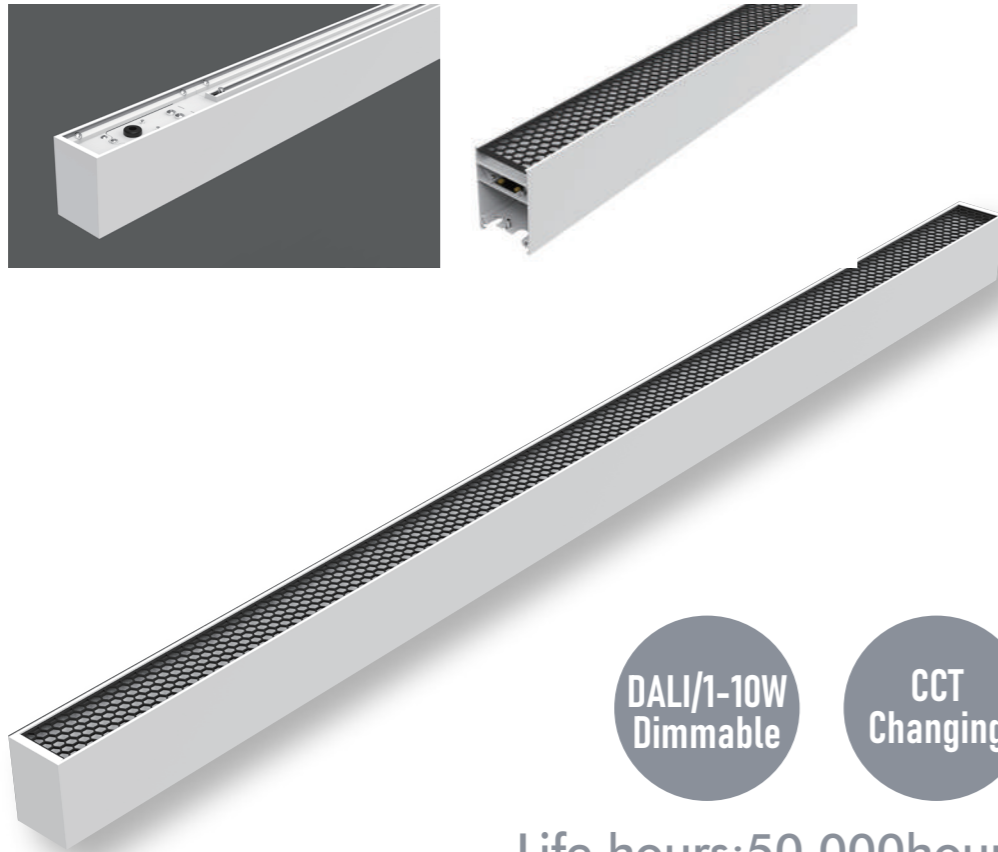


DALI/1-10W
Dimmable

CCT
Changing

Life hours:50,000hours
5years warranty

LED Linear Light Muses Type

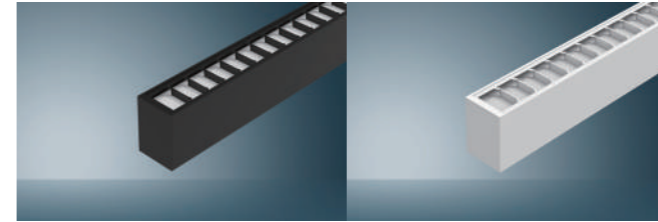

DALI/1-10W
Dimmable

CCT
Changing

Life hours:50,000hours
5years warranty

Application



Living rooms/Office/Hospitals/Warehouses
 Retails Etc./Meeting rooms/
 Shopping markets/School
 Restaurants/Airport

Power	L/W	DF	Beam angle	Housing Color	Size (MM)	Certification NO.	Reference Item
24W	90	>0.9	80°/90°	White/Black/Silver	L:600*W:64*H:78 L:600*W:50*H:70	LED linear 12W	ESM-6378-60-24W ESM-5070-60-24W
30W 36W	90	>0.9	80°/90°	White/Black/Silver	L:1200*W:64*H:78 L:1200*W:50*H:70	LED linear 30W	ESM-6378-120-30/36W ESM-5070-120-30/36W
40W	90	>0.9	80°/90°	White/Black/Silver	L:1500*W:64*H:78 L:1500*W:50*H:70	LED linear 40W	ESM-6378-150-40W ESM-5070-150-40W
50W	90	>0.9	80°/90°	White/Black/Silver	L:1800*W:64*H:78 L:1800*W:50*H:70	LED linear 50W	ESM-6378-180-50W ESM-5070-180-50W
60W	90	>0.9	80°/90°	White/Black/Silver	L:2400*W:64*H:78 L:2400*W:50*H:70	LED linear 60W	ESM-6378-240-60W ESM-5070-240-60W
80W	90	>0.9	80°/90°	White/Black/Silver	L:3000*W:64*H:78 L:3000*W:50*H:70	LED linear 80W	ESM-6378-300-80W ESM-5070-300-80W
WW:2700-3500K NW: 4000-4500K PW: 5000-5500K CW:6000-6500K							
IP20,IK08,1-10V Dimmable,Dali,CCT changing,Ripple<5%,Flicker free,Input voltage:100-240V AC,CRI>80/>90							